




# Baza

## Downlight Fixed

Scan QR code for Baza in black



### Also available



Diameter	110mm						140mm							
	Matt 60°													
System Power	8.5W	8.7W	13.6W	14.1W	20.3W	20.7W	9W	8.9W	12.4W	12.3W	18.2W	18W	21.1W	20.8W
CRI	>80Ra						>80Ra							
CCT	3000K	4000K	3000K	4000K	3000K	4000K	3000K	4000K	3000K	4000K	3000K	4000K	3000K	4000K
System Lumen	735lm	766lm	1189lm	1232lm	1620lm	1668lm	921lm	991lm	1387lm	1488lm	1988lm	2128lm	2281lm	2452lm
System Efficacy	86lm/W	88lm/W	87lm/W	87lm/W	80lm/W	80lm/W	102lm/W	111lm/W	112lm/W	121lm/W	109lm/W	118lm/W	108lm/W	118lm/W
Driver	200mA	200mA	350mA	350mA	500mA	500mA	225mA	225mA	350mA	350mA	500mA	500mA	600mA	600mA
L+B values (50.000 hr)	L80B10 (50.000h)													




Diameter	165mm											
	Matt 60°											
System Power	9.1W	9.1W	12.7W	13.2W	18.3W	19.2W	21.5W	22.3W	26.2W	27.3W	30.4W	31W
CRI	>80Ra											
CCT	3000K	4000K	3000K	4000K	3000K	4000K	3000K	4000K	3000K	4000K	3000K	4000K
System Lumen	988lm	994lm	1433lm	1441lm	2007lm	2048lm	2319lm	2348lm	2747lm	2781lm	3106lm	3136lm
System Efficacy	108lm/W	109lm/W	113lm/W	109lm/W	110lm/W	107lm/W	108lm/W	105lm/W	105lm/W	102lm/W	102lm/W	101lm/W
Driver	225mA	225mA	350mA	350mA	500mA	500mA	600mA	600mA	700mA	700mA	800mA	800mA
L+B values (50.000 hr)	L80B10 (50.000h)											

### PRODUCT LIST

Article No.	Product Name	Color	CCT	CRI	System Lumen	System Power	System Efficacy	Reflector	Cutout size
2.11.4499 / 2.11.4502 <sup>1</sup>	Baza	White	3000K	>80Ra	735lm	8.5W	86lm/W	Matt 60°	Ø 95mm
2.11.4505 / 2.11.4508 <sup>1</sup>	Baza	White	4000K	>80Ra	766lm	8.7W	88lm/W	Matt 60°	Ø 95mm
2.11.4511 / 2.11.4514 <sup>1</sup>	Baza	White	3000K	>80Ra	1189lm	13.6W	87lm/W	Matt 60°	Ø 95mm
2.11.4517 / 2.11.4520 <sup>1</sup>	Baza	White	4000K	>80Ra	1232lm	14.1W	87lm/W	Matt 60°	Ø 95mm
2.11.4523 / 2.11.4526 <sup>1</sup>	Baza	White	3000K	>80Ra	1620lm	20.3W	80lm/W	Matt 60°	Ø 95mm
2.11.4529 / 2.11.4532 <sup>1</sup>	Baza	White	4000K	>80Ra	1668lm	20.7W	80lm/W	Matt 60°	Ø 95mm
2.11.4535 / 2.11.4538 <sup>1</sup>	Baza	White	3000K	>80Ra	921lm	9W	102lm/W	Matt 60°	Ø 125mm
2.11.4541 / 2.11.4544 <sup>1</sup>	Baza	White	4000K	>80Ra	991lm	8.9W	111lm/W	Matt 60°	Ø 125mm
2.11.4547 / 2.11.4550 <sup>1</sup>	Baza	White	3000K	>80Ra	1387lm	12.4W	112lm/W	Matt 60°	Ø 125mm
2.11.4553 / 2.11.4556 <sup>1</sup>	Baza	White	4000K	>80Ra	1488lm	12.3W	121lm/W	Matt 60°	Ø 125mm
2.11.4559 / 2.11.4562 <sup>1</sup>	Baza	White	3000K	>80Ra	1988lm	18.2W	109lm/W	Matt 60°	Ø 125mm
2.11.4565 / 2.11.4568 <sup>1</sup>	Baza	White	4000K	>80Ra	2128lm	18W	118lm/W	Matt 60°	Ø 125mm
2.11.4571 / 2.11.4574 <sup>1</sup>	Baza	White	3000K	>80Ra	2281lm	21.1W	108lm/W	Matt 60°	Ø 125mm
2.11.4577 / 2.11.4580 <sup>1</sup>	Baza	White	4000K	>80Ra	2452lm	20.8W	118lm/W	Matt 60°	Ø 125mm
2.11.4583 / 2.11.4586 <sup>1</sup>	Baza	White	3000K	>80Ra	988lm	9.1W	108lm/W	Matt 60°	Ø 145mm
2.11.4589 / 2.11.4592 <sup>1</sup>	Baza	White	4000K	>80Ra	994lm	9.1W	109lm/W	Matt 60°	Ø 145mm
2.11.4595 / 2.11.4598 <sup>1</sup>	Baza	White	3000K	>80Ra	1433lm	12.7W	113lm/W	Matt 60°	Ø 145mm
2.11.4601 / 2.11.4604 <sup>1</sup>	Baza	White	4000K	>80Ra	1441lm	13.2W	109lm/W	Matt 60°	Ø 145mm
2.11.4607 / 2.11.4610 <sup>1</sup>	Baza	White	3000K	>80Ra	2007lm	18.3W	110lm/W	Matt 60°	Ø 145mm
2.11.4613 / 2.11.4616 <sup>1</sup>	Baza	White	4000K	>80Ra	2048lm	19.2W	107lm/W	Matt 60°	Ø 145mm
2.11.4619 / 2.11.4622 <sup>1</sup>	Baza	White	3000K	>80Ra	2319lm	21.5W	108lm/W	Matt 60°	Ø 145mm
2.11.4625 / 2.11.4628 <sup>1</sup>	Baza	White	4000K	>80Ra	2348lm	22.3W	105lm/W	Matt 60°	Ø 145mm
2.11.4631 / 2.11.4634 <sup>1</sup>	Baza	White	3000K	>80Ra	2747lm	26.2W	105lm/W	Matt 60°	Ø 145mm
2.11.4637 / 2.11.4640 <sup>1</sup>	Baza	White	4000K	>80Ra	2781lm	27.3W	102lm/W	Matt 60°	Ø 145mm
2.11.4643 / 2.11.4646 <sup>1</sup>	Baza	White	3000K	>80Ra	3106lm	30.4W	102lm/W	Matt 60°	Ø 145mm
2.11.4649 / 2.11.4652 <sup>1</sup>	Baza	White	4000K	>80Ra	3136lm	31W	101lm/W	Matt 60°	Ø 145mm

<sup>1</sup>Article No. with <sup>1</sup> indicates DALI dimmable driver is included.

Scan QR code for Baza in black

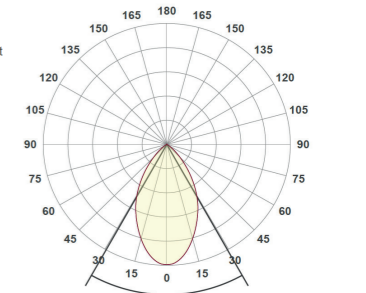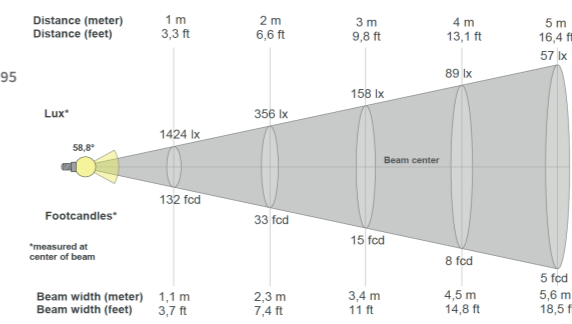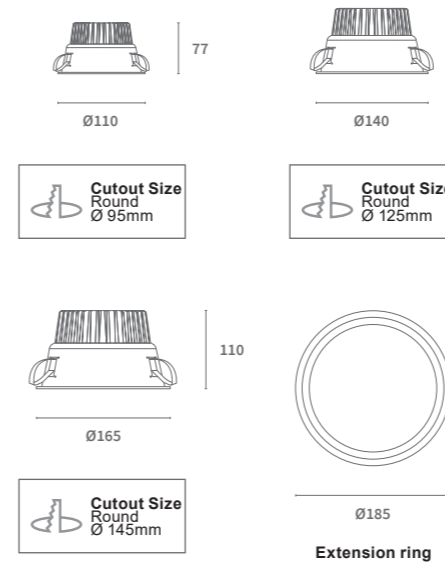

### ALSO AVAILABLE



Article No.	Description	Color	Size
2.01.1261	Extension ring for Baza Ø 165mm	White	Ø 185mm
-----	Emergency kit available on request		



# Baza

## Downlight Fixed

Scan QR code for Baza in black

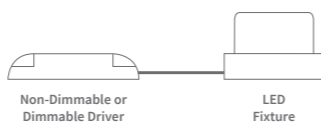

### Also available




<b>Diameter</b>	190mm											
<b>Reflector</b>	Matt 60°											
<b>System Power</b>	9.1W	9.4W	12.8W	13.1W	18.7W	19.2W	21.5W	22.5W	26.4W	27.6W	30.3W	31.6W
<b>CRI</b>	>80Ra											
<b>CCT</b>	3000K	4000K	3000K	4000K	3000K	4000K	3000K	4000K	3000K	4000K	3000K	4000K
<b>System Lumen</b>	988lm	1034lm	1424lm	1482lm	2024lm	2177lm	2304lm	2442lm	2735lm	2889lm	3106lm	3251lm
<b>System Efficacy</b>	108lm/W	110lm/W	111lm/W	113lm/W	108lm/W	113lm/W	107lm/W	108lm/W	103lm/W	105lm/W	102lm/W	103lm/W
<b>Driver</b>	225mA	225mA	350mA	350mA	500mA	500mA	600mA	600mA	700mA	700mA	800mA	800mA
<b>L+B values (50.000 hr)</b>	L80B10 (50.000h)											

<b>Diameter</b>	230mm											
<b>Reflector</b>	Matt 60°											
<b>System Power</b>	12.6W	13.1W	18.5W	19.1W	21.6W	22.4W	26.2W	27.3W	30.5W	31.3W		
<b>CRI</b>	>80Ra											
<b>CCT</b>	3000K	4000K	3000K	4000K	3000K	4000K	3000K	4000K	3000K	4000K		
<b>System Lumen</b>	1508lm	1542lm	2139lm	2175lm	2461lm	2509lm	2916lm	2976lm	3322lm	3497lm		
<b>System Efficacy</b>	120lm/W	118lm/W	116lm/W	114lm/W	114lm/W	112lm/W	111lm/W	109lm/W	109lm/W	112lm/W		
<b>Driver</b>	350mA	350mA	500mA	500mA	600mA	600mA	700mA	700mA	800mA	800mA		
<b>L+B values (50.000 hr)</b>	L80B10 (50.000h)											

Article No.	Product Name	Color	CCT	CRI	System Lumen	System Power	System Efficacy	Reflector	Cutout size
2.11.4655 / 2.11.4658 <sup>1</sup>	Baza	White	3000K	>80Ra	988lm	9.1W	108lm/W	Matt 60°	Ø 165mm
2.11.4661 / 2.11.4664 <sup>1</sup>	Baza	White	4000K	>80Ra	1034lm	9.4W	110lm/W	Matt 60°	Ø 165mm
2.11.4667 / 2.11.4670 <sup>1</sup>	Baza	White	3000K	>80Ra	1424lm	12.8W	111lm/W	Matt 60°	Ø 165mm
2.11.4673 / 2.11.4676 <sup>1</sup>	Baza	White	4000K	>80Ra	1482lm	13.1W	113lm/W	Matt 60°	Ø 165mm
2.11.4679 / 2.11.4682 <sup>1</sup>	Baza	White	3000K	>80Ra	2024lm	18.7W	108lm/W	Matt 60°	Ø 165mm
2.11.4685 / 2.11.4688 <sup>1</sup>	Baza	White	4000K	>80Ra	2177lm	19.2W	113lm/W	Matt 60°	Ø 165mm
2.11.4691 / 2.11.4694 <sup>1</sup>	Baza	White	3000K	>80Ra	2304lm	21.5W	107lm/W	Matt 60°	Ø 165mm
2.11.4697 / 2.11.4700 <sup>1</sup>	Baza	White	4000K	>80Ra	2442lm	22.5W	108lm/W	Matt 60°	Ø 165mm
2.11.4703 / 2.11.4706 <sup>1</sup>	Baza	White	3000K	>80Ra	2735lm	26.4W	103lm/W	Matt 60°	Ø 165mm
2.11.4709 / 2.11.4712 <sup>1</sup>	Baza	White	4000K	>80Ra	2889lm	27.6W	105lm/W	Matt 60°	Ø 165mm
2.11.4715 / 2.11.4718 <sup>1</sup>	Baza	White	3000K	>80Ra	3106lm	30.3W	102lm/W	Matt 60°	Ø 165mm
2.11.4721 / 2.11.4724 <sup>1</sup>	Baza	White	4000K	>80Ra	3251lm	31.6W	103lm/W	Matt 60°	Ø 165mm
2.11.4727 / 2.11.4730 <sup>1</sup>	Baza	White	3000K	>80Ra	1508lm	12.6W	120lm/W	Matt 60°	Ø 210mm
2.11.4733 / 2.11.4736 <sup>1</sup>	Baza	White	4000K	>80Ra	1542lm	13.1W	118lm/W	Matt 60°	Ø 210mm
2.11.4739 / 2.11.4742 <sup>1</sup>	Baza	White	3000K	>80Ra	2139lm	18.5W	116lm/W	Matt 60°	Ø 210mm
2.11.4745 / 2.11.4748 <sup>1</sup>	Baza	White	4000K	>80Ra	2175lm	19.1W	114lm/W	Matt 60°	Ø 210mm
2.11.4751 / 2.11.4754 <sup>1</sup>	Baza	White	3000K	>80Ra	2461lm	21.6W	114lm/W	Matt 60°	Ø 210mm
2.11.4757 / 2.11.4760 <sup>1</sup>	Baza	White	4000K	>80Ra	2509lm	22.4W	112lm/W	Matt 60°	Ø 210mm
2.11.4763 / 2.11.4766 <sup>1</sup>	Baza	White	3000K	>80Ra	2916lm	26.2W	111lm/W	Matt 60°	Ø 210mm
2.11.4769 / 2.11.4772 <sup>1</sup>	Baza	White	4000K	>80Ra	2976lm	27.3W	109lm/W	Matt 60°	Ø 210mm
2.11.4775 / 2.11.4778 <sup>1</sup>	Baza	White	3000K	>80Ra	3322lm	30.5W	109lm/W	Matt 60°	Ø 210mm
2.11.4781 / 2.11.4784 <sup>1</sup>	Baza	White	4000K	>80Ra	3497lm	31.3W	112lm/W	Matt 60°	Ø 210mm

<sup>1</sup>Article No. with <sup>1</sup> indicates DALI dimmable driver is included.  
Scan QR code for Baza in black

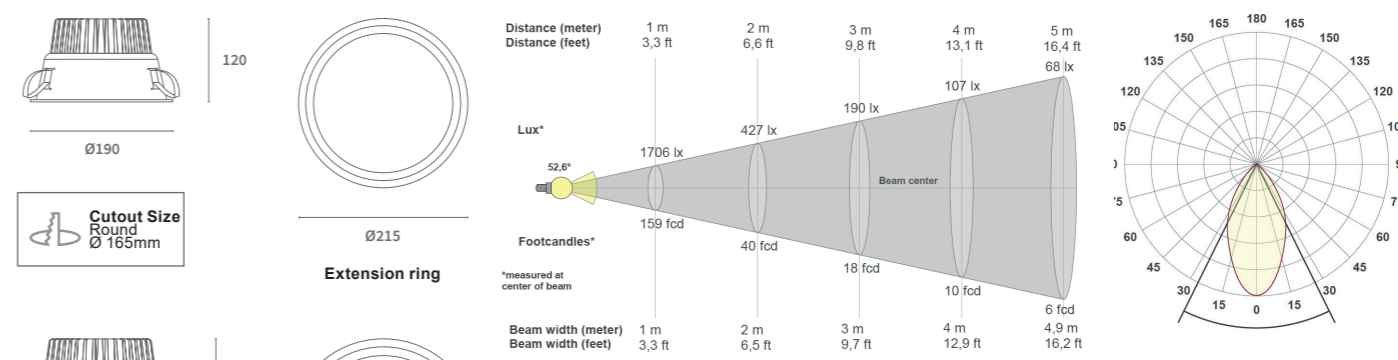

Article No.	Description	Color	Size
2.01.1262	Extension ring for Baza Ø 190mm	White	Ø 215mm
2.01.1263	Extension ring for Baza Ø 230mm	White	Ø 260mm
-----	Emergency kit available on request		